




# Tangra™ M Pro HD

## 515-530W

N-type high density bifacial double glass mono module

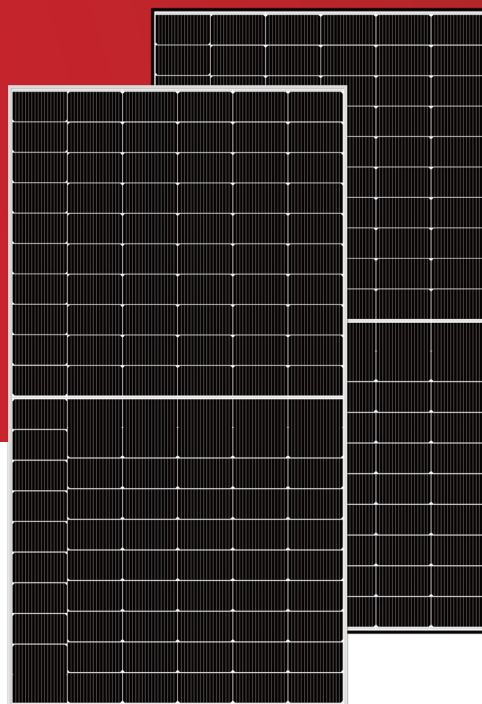

Bifacial technology enables additional energy harvesting from rear side (up to 30%)



30-year lifespan delivers 10-30% more power compared with conventional P-type modules



The natural lack of LID in the N-type solar cell can increase power generation



Excellent low irradiance performance




Better light trapping and current collection to improve module power output and reliability



Industry-leading, lowest thermal coefficient



Optimized electrical design and lower operating current for reduced hot spot loss and better temperature




Certified to withstand 2400 Pa of wind load and 5400 Pa of snow load



100% triple EL test, which greatly reduces the hidden cracks rate

### LINEAR PERFORMANCE WARRANTY

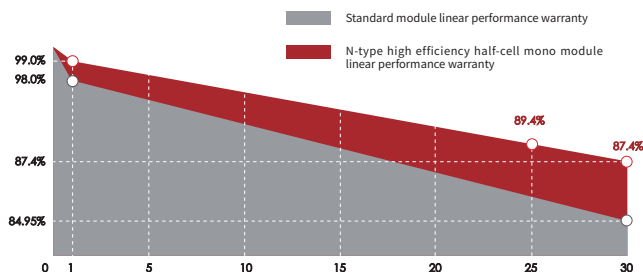

**15** years

Product quality & process guarantee

**30** years

Linear power guarantee

**0.40**%

Annual degradation

### COMPREHENSIVE CERTIFICATES



ISO 9001: Quality Management System

ISO 14001: Environmental Management System Standard

ISO 45001: International Occupational Health and Safety Assessment System Standard

SA8000: 2014 Social Accountability Management System

### WARRANTY INSURANCE



\* Optional performance warranty insurance. Please contact our local sales staff for more information.

\* Different markets have different certification requirements. Also, the products are under rapid innovation. Please confirm the certification status with regional sales representatives.

## ELECTRICAL CHARACTERISTICS

Model of modules	SS-BG515-60MDH-G13(T)		SS-BG520-60MDH-G13(T)		SS-BG525-60MDH-G13(T)		SS-BG530-60MDH-G13(T)	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum power — $P_{mp}$ (W)	515	388	520	392	525	395	530	399
Open-circuit voltage — $V_{oc}$ (V)	43.32	40.89	43.52	41.08	43.73	41.28	43.94	41.48
Short-circuit current — $I_{sc}$ (A)	15.09	12.19	15.15	12.24	15.21	12.29	15.27	12.34
Maximum power voltage — $V_{mp}$ (V)	36.19	33.88	36.39	34.07	36.58	34.24	36.77	34.42
Maximum power current — $I_{mp}$ (A)	14.23	11.45	14.29	11.50	14.35	11.55	14.41	11.60
Module efficiency — $\eta_m$ (%)	21.7		21.9		22.1		22.3	

**STC** (Standard Testing Conditions): Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25 °C, Spectra at AM1.5

**NOCT** (Nominal Operating Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/s

## ELECTRICAL CHARACTERISTICS WITH DIFFERENT POWER BIN (REFERENCE TO 13.5% IRRADIANCE RATIO)

Peak Power ( $P_{max}$ ) (W)	571	576	582	587
Open Circuit Voltage ( $V_{oc}$ ) (V)	43.32	43.52	43.73	43.94
Short Circuit Current ( $I_{sc}$ ) (A)	16.72	16.79	16.85	16.92
MPP Voltage ( $V_{mp}$ ) (V)	36.19	36.39	36.58	36.77
MPP Current ( $I_{mp}$ ) (A)	15.77	15.83	15.90	15.97

## STRUCTURAL CHARACTERISTICS

Module size (L*W*H)	2094 x 1134 x 30 mm
Weight	28.7 kg
Cell	120 cells, N-type monocrystalline
Front glass	2.0mm, anti-reflection coating
Back glass	2.0mm, heat strengthened glass
Frame	Anodized aluminum alloy (Silver/Black)
Junction box	IP68, 3 diodes
Output wire	4.0 mm <sup>2</sup>
Wire length	300mm/1200mm/customized
Connector	MC4 Compatible
Packing Specification	36pcs/pallet; 792 pcs/40'HQ


## OPERATING PARAMETERS

Power tolerance (W)	(0,+5)
Maximum system voltage (V)	1500
Maximum rated fuse current (A)	30
Current operating temperature (°C)	-40~+85 °C
Mechanical load	5400 Pa * / 2400 Pa ☺

## TEMPERATURE PERFORMANCE RATINGS


TANGRA temperature coefficient ( $P_{max}$ )	-0.30 %/°C
Temperature coefficient ( $V_{oc}$ )	-0.28 %/°C
Temperature coefficient ( $I_{sc}$ )	+0.04 %/°C
Nominal operating cell temperature	43±2 °C

## MODULE DIMENSIONS (MM)

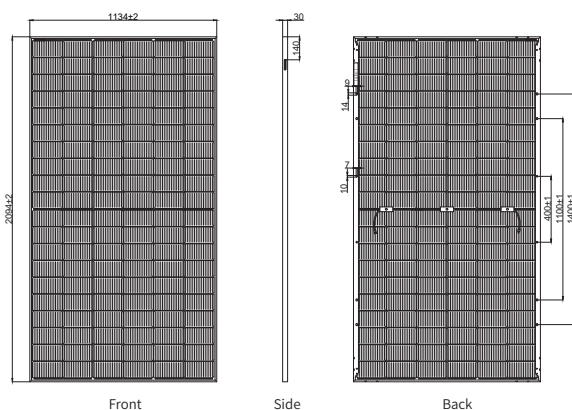

\* The unmarked tolerance is ±1 mm  
Length shown in mm

Characteristic curves (530W)

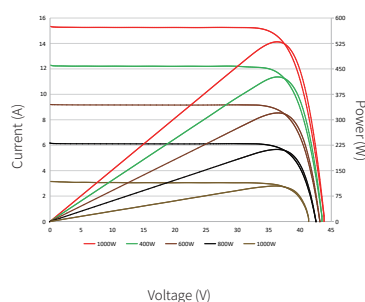

Temperature Dependence of  $I_{sc}, V_{oc}, P_{max}$

