


Zosma™ S Pro Black

400-420W (Full Black)

High Efficiency Bifacial Dual Glass Mono Module

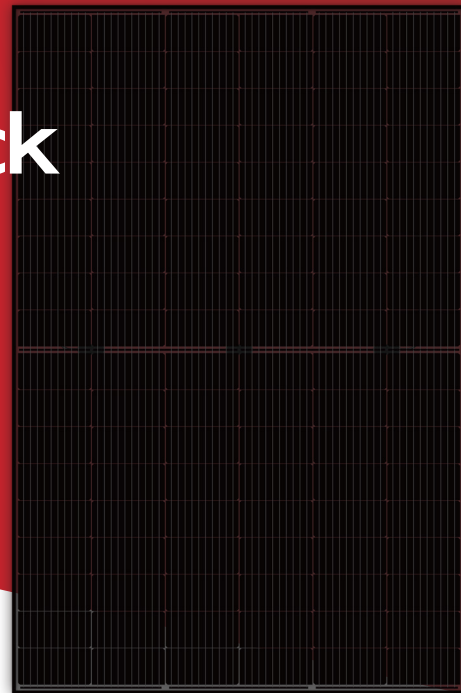

Bifacial technology enables additional energy harvesting from rear side (up to 30%)



Excellent low irradiance performance



Better light trapping and current collection to improve module power output and reliability



Industry-leading, lowest thermal coefficient



Optimized electrical design and lower operating current for reduced hot spot loss and better temperature




Certified to withstand 2400 Pa of wind load and 5400 Pa of snow load



100% triple EL test, which greatly reduces the hidden cracks rate

LINEAR PERFORMANCE WARRANTY

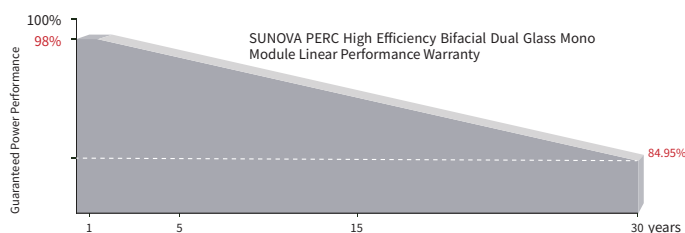

15 years

Product quality & process guarantee

30 years

Linear power guarantee

0.45 %

Annual degradation over 30 years

COMPREHENSIVE CERTIFICATES



IEC61215/IEC61730/IEC61701/IEC62716/
IEC62804/IEC60068/UL61730

ISO 9001: Quality Management System

ISO 14001: Environmental Management System Standard

ISO 45001: International Occupational Health and Safety Assessment System Standard

SA 8000: 2014 Social Accountability Management System

* Different markets have different certification requirements. Also, the products are under rapid innovation. Please confirm the certification status with regional sales representatives.

PERFORMANCE INSURANCE



* Optional performance warranty insurance. Please contact our local sales representatives for more information.

ELECTRICAL CHARACTERISTICS

Model of modules	SS-BG400-54MDH		SS-BG405-54MDH		SS-BG410-54MDH		SS-BG415-54MDH		SS-BG420-54MDH	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum power — P_{mp} (W)	400	298	405	302	410	306	415	310	420	313
Open-circuit voltage — V_{oc} (V)	37.18	35.10	37.33	35.24	37.68	35.57	37.79	35.67	38.00	35.87
Short-circuit current — I_{sc} (A)	13.39	10.82	13.44	10.86	13.59	10.98	13.72	11.08	13.80	11.15
Maximum power voltage — V_{mp} (V)	31.42	29.41	31.55	29.54	31.84	29.81	31.94	29.90	32.11	30.06
Maximum power current — I_{mp} (A)	12.74	10.14	12.84	10.22	12.88	10.25	13.01	10.35	13.09	10.42
Module efficiency — η_m (%)	20.48		20.74		21.00		21.25		21.51	

STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25 °C, Spectra at AM1.5

NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/s

ELECTRICAL CHARACTERISTICS WITH DIFFERENT POWER BIN (REFERENCE TO 13.5% IRRADIANCE RATIO)

Peak Power (P_{max}) (W)	438	443	449	455	460
Open Circuit Voltage (V_{oc}) (V)	37.18	37.33	37.68	37.79	38.00
Short Circuit Current (I_{sc}) (A)	14.66	14.71	14.87	15.02	15.10
Maximum power voltage — V_{mp} (V)	31.42	31.55	31.84	31.94	32.11
Maximum power current — I_{mp} (A)	13.94	14.05	14.10	14.24	14.33

STRUCTURAL CHARACTERISTICS

Module size (L*W*H)	1722 x 1134 x 30 mm
Weight	24.2kg
Cell	108 cells, PERC Monocrystalline
Front glass	2.0mm, Anti-Reflection Coating
Back glass	2.0mm, Heat Strengthened Glass
Frame	Black anodized aluminum alloy
Junction box	IP68, 3 bypass diodes
Output wire	4.0 mm ²
Wire length	300 mm / 1200 mm or Customized Length
Connector	MC4 Compatible
Packing Specification	36 pcs/Pallet; 936 pcs/40'HQ


OPERATING PARAMETERS

Power tolerance (W)	(0,+5)
Maximum system voltage (V)	1500
Maximum rated fuse current (A)	30
Current operating temperature (°C)	-40~+85 °C
Mechanical load	5400 Pa / 2400 Pa

TEMPERATURE RATINGS

Temperature coefficient (P_{max})	-0.33 %/°C
Temperature coefficient (V_{oc})	-0.26 %/°C
Temperature coefficient (I_{sc})	+0.06 %/°C
Nominal operating cell temperature	43±2 °C

MODULE DIMENSIONS (MM)

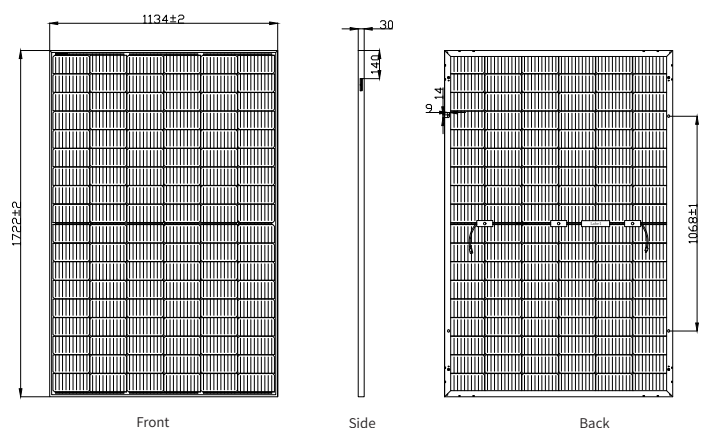

* The unmarked tolerance is ±1 mm
Length shown in mm

